

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/18/06'		

NOTES:

1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 100mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min


2.PRODUCT NUMBER CODE:

DS1110-01 - X X X


CONTACT PLATING
6: TIN

COLOR OF HOUSING:
W: WHITE
B: BLACK


No. OF CONTACTS
2: 2pin
4: 4pin

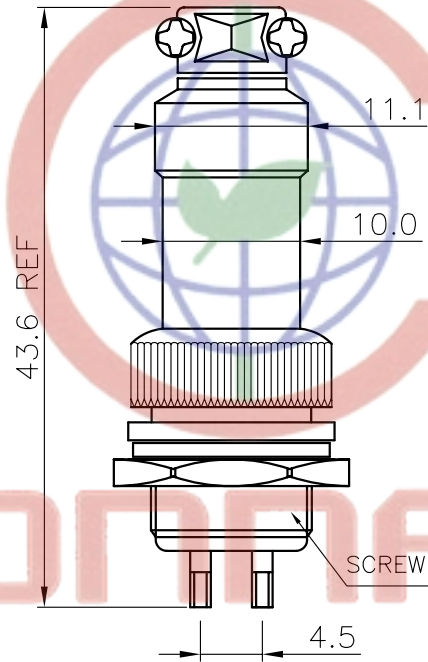


2 PIN




3 PIN




4 PIN




5 PIN




6 PIN




7 PIN



8 PIN



9 PIN

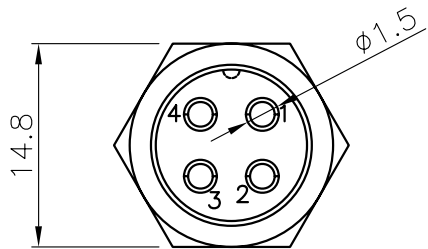

4 PIN

Tel: 86-574-63508187

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1110-01 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1110-01-XXX					

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD